


PatioDrip™ Self-Watering System Starter Kit for Hanging Baskets

PACKAGE CONTENTS

- 1 μDripRing self-watering valves (x2)
- 2 μDripReg water pressure reducer (x1)
- 3 GHT-to-3mm tubing adapter (x1)
- 4 3mm tubing (65 ft)
- 5 Spare connectors (Tx1, unionx1)
- 6 Tubing clips (x10)
- 7 Small screwdriver (for weight adjustment, x1)

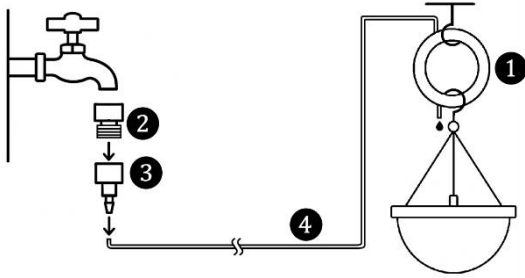

HOW IT WORKS

The μDripReg water pressure reducer provides a low-pressure water supply to the μDripRing. The μDripRing will maintain the pre-set weight automatically.

As water in the basket evaporates, it gets lighter, the μDripRing will then open to let water drip in. When the basket is watered and returned to original weight, the μDripRing shuts off.

BASKET SIZE GUIDELINES


Maximum capacity: Supports baskets up to **12 lb** in weight. Works best for a 12-inche or smaller basket filled with lightly moistened potting mix.

INSTALLATION

1. Hang the μDripRing from ceiling hook, bracket, or other support. Then place the basket on the lower end of the ring.
2. Connect tubing to the water supply connector of the ring.
3. Run tubing to the garden faucet. Use the clips to hold tubing in place.
4. Connect μDripReg to the garden faucet. Adjust water pressure as instructed in the following section.
5. Connect GHT-tubing adapter to the μDripReg.
6. Connect tubing to the adapter.

ADJUST μDripReg

1. Turn on the faucet slightly. If water flows out, skip Step 2.
2. Turn the dial counterclockwise until water flows out.
3. Turn the dial clockwise until you reach the **shut-off point** (water stops). Do not continue past this point.
4. Turn the dial counterclockwise ¼ to ½ turn. You will be able to see a steady gentle flow of water out of the reducer.
5. Turn off the faucet and connect the adapter to the μDripReg.
6. Turn on the faucet to doublecheck a gentle flow of water out of the adapter.
7. Turn off the faucet and connect the tubing to the adapter.

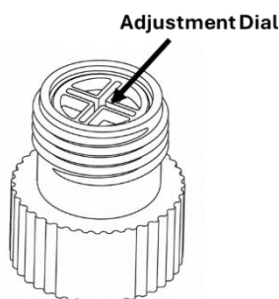

PRIME and CALIBRATE μDripRing

1. Before setup, ensure the basket soil is lightly moistened — damp but not fully saturated. The μDripRing is designed to maintain this consistent, gentle level of moisture.
2. Place baskets on the rings. Lighter baskets (1-6 lb) should be placed in the middle of the lower end of the ring, heavier baskets (6-12 lb) on the right side of the lower end.
3. Turn on the faucet.
4. Lift basket until water flows out from the outlet.
5. Put down the basket and let the water shut off.
6. Use the small screwdriver to turn the adjustment screw counterclockwise slowly until a single water drop appears at the outlet.
7. Lightly lift the basket to observe water dripping out.
8. Now the valve is calibrated.
9. If you over adjust the ring, use the reset button to reset the valve and repeat from Step 6.
10. A small piece of tubing can be attached to the outlet to guide the water to the basket (optional).
11. **Caution: Do not** turn the adjustment screw clockwise without releasing the reset button, or overtight the adjustment screw to avoid permanent damage to the device. **Do not** connect μDripRing directly to the water supply with pressure higher than 30 PSI.

